



## WORKING RANGE

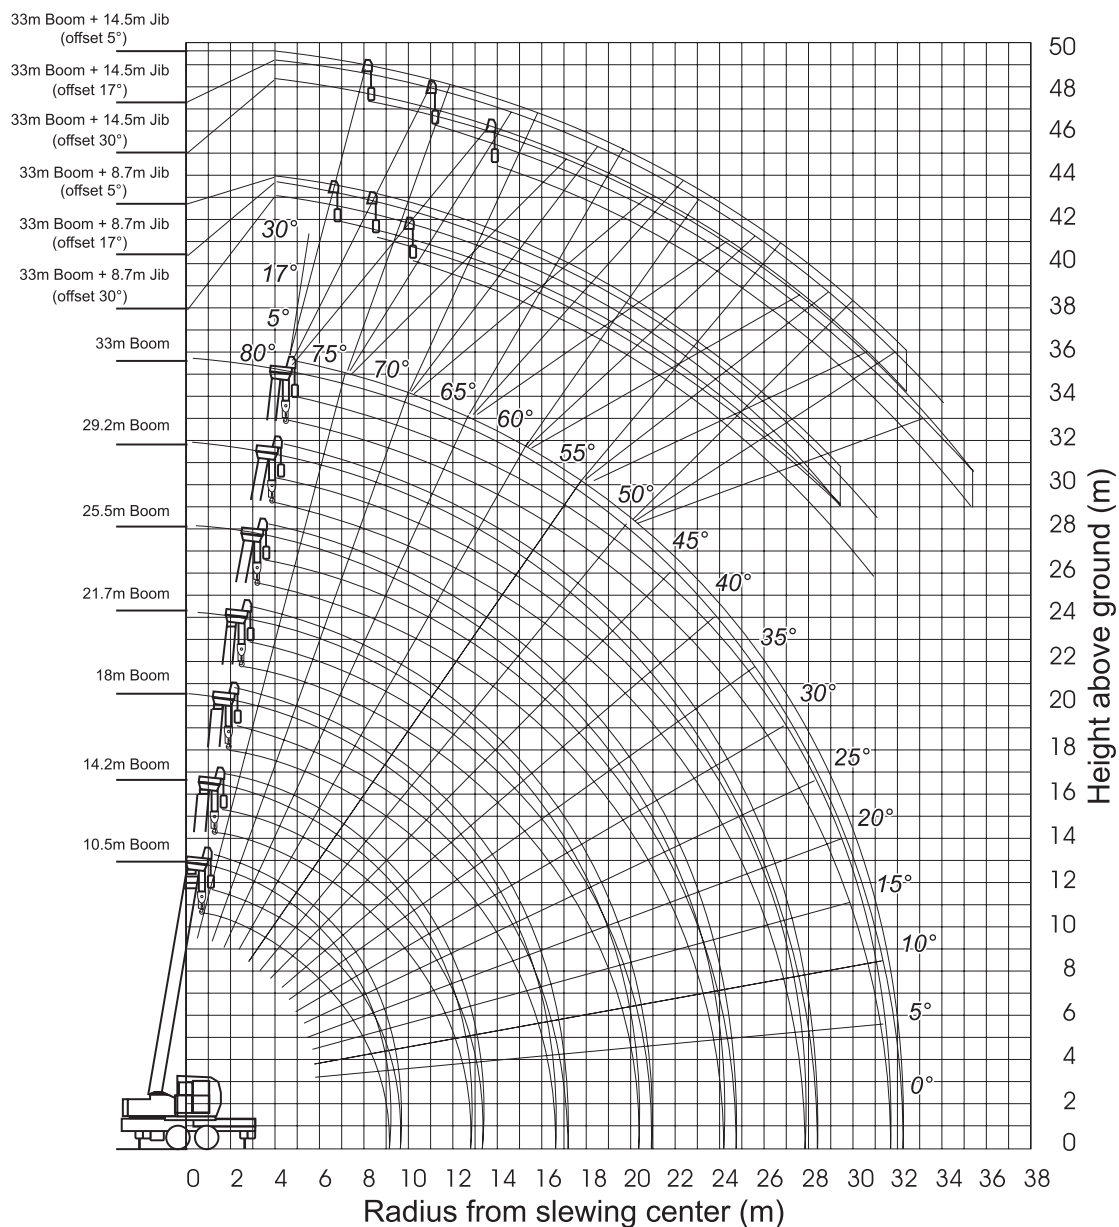

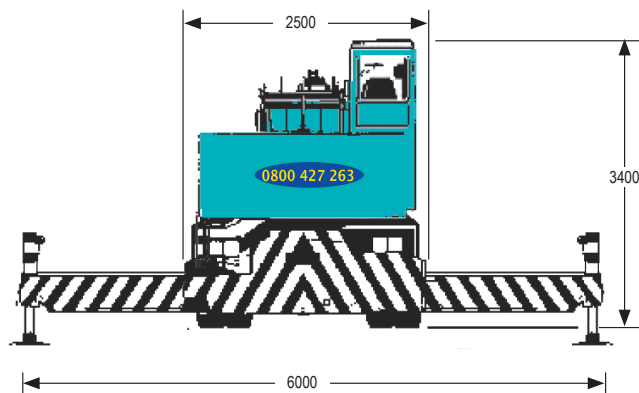

### Outriggers fully extended with front jack - 360° full range

Working Radius (m)	10.5 m Boom	14.2 m Boom	18 m Boom	21.7 m Boom	25.5 m Boom	29.2 m Boom	33 m Boom
2.5	30.00	20.00	16.00				
3.0	30.00	20.00	16.00				
3.5	25.40	20.00	16.00	12.00			
4.0	22.90	20.00	16.00	12.00	11.50		
4.5	21.00	20.00	16.00	12.00	11.50		
5.0	19.40	18.40	16.00	12.00	11.50	9.00	
6.0	16.20	15.30	13.70	12.00	11.50	9.00	7.00
7.0	13.70	12.65	11.95	11.00	10.00	9.00	7.00
8.0	11.15	10.65	10.55	10.20	8.90	8.20	7.00
8.5	10.25	9.70	9.65	9.65	8.45	7.80	6.60
9.0		8.80	8.80	9.20	8.05	7.45	6.25
10.0		7.30	7.15	7.65	7.30	6.75	5.50
12.0		5.10	4.95	5.40	5.65	5.65	4.80
12.5		4.70	4.55	5.05	5.25	5.45	4.55
13.0			4.20	4.85	4.90	5.05	4.45
14.0			3.55	4.00	4.25	4.40	4.10
16.0			2.55	2.95	3.20	3.40	3.50
18.0				2.20	2.45	2.65	2.80
20.0				1.65	1.85	2.05	2.20
22.0					1.40	1.60	1.70
24.0						1.20	1.35
26.0						0.90	1.00
27.5						0.79	0.85
29.0							0.65
31.0							0.45
Standard hook	for 30 ton						
Hook weight	300 kg						